



## Φ20mm Metal Oxide Varistor 20D101K / 20D101KJ Wide Operating Voltage V1mA 18V - 1800V

Our Product Introduction

for more products please visit us on socaydiode.com

### Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: UL, REACH, RoHS, ISO
- Model Number: 20D101K/20D101KJ
- Minimum Order Quantity: 250PCS
- Price: Negotiable
- Packaging Details: Bulk, AMMO packing
- Delivery Time: 1-2weeks



### Product Specification

- Description: DIP Variation
- Dimensions: Φ20mm
- VAC: 60V
- VDC: 85V
- Varistor Voltage: 100(90~110)V
- IP: 100A
- VC: 165V
- Rated Power: 1.0W
- Typ. Capacitance: 4000pF
- Withstanding Surge Current: 6.5KA (1 Time)
- Usage: Circuit Protection
- Highlight: Metal Oxide Varistor 20D101K,  
Metal Oxide Varistor 20D101KJ



### More Images



### Product Description

Φ20mm Series 20D101K/20D101KJ Metal Oxide Varistor Wide Operating Voltage (V1mA) Range from 18V to 1800V

**DATASHEET: [20D Series\\_v2306.1.pdf](#)**

#### 1. Working Standard

Connected in parallel to the circuit, when the device is inactive, the resistance value is high and can be considered as an open circuit with little or no effect on the circuit. When there is an abnormal pulse, the resistance value drops instantly and the current is released momentarily. When the abnormal high voltage disappears, it returns to its high resistance state and the circuit works normally.

Description :semiconductor components

Type Number	Maximum Allowable voltage		Varistor Voltage	Maximum Clamping Voltage		Withstanding Surge Current		Maximum Energy (10/1000μs)	Rated Power (W)	Typical Capacitance (Reference) @1KHZ (pf)
	Standard	High Surge		V <sub>AC</sub> (V)	V <sub>DC</sub> (V)	V <sub>1mA</sub> (V)	I <sub>P</sub> (A)			

Our Product Introduction

for more products please visit us on socayplode.com

						1 Tim e	2 Tim es	1 Time	2 Times					
20D180K	20D180KJ	11	14	18(15~21-6)	20	36	200	100	3000	100	11	13	0.2	28500
20D220K	20D220KJ	14	18	22(19.5~26)	20	43	200	100	3000	100	14	16	0.2	18500
20D270K	20D270KJ	17	22	27(24~30)	20	53	200	100	3000	100	16	19	0.2	13000
20D330K	20D330KJ	20	26	33(29.5~36.5)	20	66	200	100	3000	100	23	24	0.2	11500
20D390K	20D390KJ	25	31	39(35~43)	20	77	200	100	3000	100	26	28	0.2	8500
20D470K	20D470KJ	30	38	47(42~54)	20	93	200	100	3000	100	30	34	0.2	7400
20D560K	20D560KJ	35	45	56(50~62)	20	100	200	100	3000	100	41	41	0.2	6500
20D680K	20D680KJ	40	56	68(61~75)	20	135	200	100	3000	100	46	49	0.2	5800
20D820K	20D820KJ	50	65	82(74~90)	10	135	650	400	1000	700	38	56	1.0	4900
20D101K	20D101KJ	60	85	100(90~110)	10	165	650	400	1000	700	45	70	1.0	4000
20D121K	20D121KJ	75	100	120(108~132)	10	200	650	400	1000	700	55	85	1.0	3300
20D151K	20D151KJ	95	125	150(135~165)	10	250	650	400	1000	700	70	106	1.0	2700
20D181K	20D181KJ	115	150	180(162~198)	10	300	650	400	1000	700	85	130	1.0	2200
20D201K	20D201KJ	130	170	200(180~220)	10	340	650	400	1000	700	95	140	1.0	2000
20D221K	20D221KJ	140	180	220(198~242)	10	360	650	400	1000	700	100	155	1.0	1800
20D241K	20D241KJ	150	200	240(216~264)	10	395	650	400	1000	700	108	168	1.0	1650
20D271K	20D271KJ	175	225	270(243~297)	10	455	650	400	1000	700	127	190	1.0	1500
20D301K	20D301KJ	190	250	300(270~330)	10	500	650	400	1000	700	136	210	1.0	1300
20D331K	20D331KJ	210	275	330(297~363)	10	550	650	400	1000	700	150	228	1.0	1200
20D361K	20D361KJ	230	300	360(324~396)	10	595	650	400	1000	700	163	255	1.0	1100
20D391K	20D391KJ	250	320	390(351~429)	10	650	650	400	1000	700	180	275	1.0	1000
20D431K	20D431KJ	275	350	430(387~473)	10	710	650	400	1000	700	190	305	1.0	930
20D471K	20D471KJ	300	385	470(423~517)	10	775	650	400	1000	700	220	350	1.0	850
20D511K	20D511KJ	320	415	510(459~561)	10	845	650	400	1000	700	220	360	1.0	780
20D561K	20D561KJ	350	460	560(504~616)	10	925	650	400	1000	700	220	380	1.0	710
20D621K	20D621KJ	385	505	620(558~682)	10	1025	650	400	1000	700	220	390	1.0	650
20D681K	20D681KJ	420	560	680(612~748)	10	1120	650	400	1000	700	230	400	1.0	600
20D751K	20D751KJ	460	615	750(675~825)	10	1240	650	400	1000	700	255	420	1.0	530
20D781K	20D781KJ	485	640	780(702~858)	10	1290	650	400	1000	700	265	440	1.0	510
20D821K	20D821KJ	510	670	820(738~902)	10	1350	650	400	1000	700	282	460	1.0	500
20D911K	20D911KJ	550	745	910(819~1001)	10	1500	650	400	1000	700	310	510	1.0	440
20D102K	20D102KJ	625	825	1000(900~1100)	10	1650	650	400	1000	700	342	565	1.0	400
20D112K	20D112KJ	680	895	1100(990~1210)	10	1810	650	400	1000	700	383	620	1.0	460
20D122K	20D122KJ	750	990	1200(1080~1320)	10	1980	650	400	1000	700	408	660	1.0	320
20D152K	20D152KJ	900	1200	1500(1350~1650)	10	2470	650	400	1000	700	420	660	1.0	260
20D162K	20D162KJ	1000	1280	1600(1440~1760)	10	2640	650	400	1000	700	606	660	1.0	320
20D182K	20D182KJ	1000	1460	1800(1620~1980)	10	2970	650	400	1000	700	625	660	1.0	320

2.Photo show

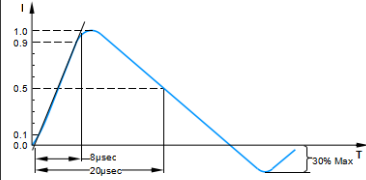


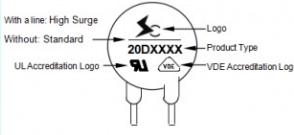
**Features:**

- u Wide operating voltage (V1mA) range from 18V to 1800V
- u Fast responding to transient over-voltage
- u Large absorbing transient energy capability
- u Low clamping ratio and no following-on current
- u Meets MSL level 1, per J-STD-020

<b>Material</b>	No Radioactive Material
<b>Operating Temperature</b>	-40 ~ +85
<b>Storage Temperature</b>	-55 ~ +125
<b>Body</b>	Nickel Plated
<b>Leads</b>	Tin Plated
<b>Devices with No lead</b>	Nickel Plated

Part Number	Quantity	Packaging Option	Packaging Specification
20DXXXX	250	Plastic Bag	Bulk Pack

Electrical Rating																											
Item	Test Condition / Description	Requirement																									
<b>Maximum Allowable Voltage</b>	The recommended maximum sine wave voltage (RMS) or the maximum DC voltage can be applied continuously.																										
<b>Varistor Voltage</b>	The voltage between two terminals with the specified measuring current 1mA DC applied is call Vb.																										
<b>Maximum Clamping Voltage</b>	The maximum voltage between two terminals with the specification standard impulse current. Applied waveform: 8/20µs 	To meet the specified value																									
<b>Rated Wattage</b>	The maximum average power that can be applied within the specified ambient temperature.																										
<b>Energy</b>	The maximum energy within the varistor voltage change of ±10% when one impulse of 10/1000µs, or 2 msec, is applied.																										
<b>Withstanding Surge Current</b>	The maximum current within the varistor voltage change of ±10% with the standard impulse current (8/20µs) applied one time																										
<b>Varistor Voltage Temp. Coefficient</b>	$\frac{V_b \text{ at } 20^{\circ}\text{C} - V_b \text{ at } 70^{\circ}\text{C}}{V_b \text{ at } 20^{\circ}\text{C}} \times \frac{1}{50} \times 100(\% / ^{\circ}\text{C})$	0.05% / °C max																									
<b>Surge Life</b>	The change of Vb shall be measured after the impulse listed below is applied 10,000 times continuously with the interval of ten seconds at room temperature. <table border="1" data-bbox="523 1691 890 1881"> <tr> <td rowspan="2">5D Series</td> <td>180K to 680K</td> <td>10A (8/20µs)</td> </tr> <tr> <td>820K to 751K</td> <td>20A (8/20µs)</td> </tr> <tr> <td rowspan="2">7D Series</td> <td>180K to 680K</td> <td>25A (8/20µs)</td> </tr> <tr> <td>820K to 821K</td> <td>50A (8/20µs)</td> </tr> <tr> <td rowspan="2">10D Series</td> <td>180K to 680K</td> <td>50A (8/20µs)</td> </tr> <tr> <td>820K to 112K</td> <td>100A (8/20µs)</td> </tr> <tr> <td rowspan="2">14D Series</td> <td>180K to 680K</td> <td>75A (8/20µs)</td> </tr> <tr> <td>820K to 182K</td> <td>150A (8/20µs)</td> </tr> <tr> <td rowspan="2">20D Series</td> <td>180K to 680K</td> <td>100A (8/20µs)</td> </tr> <tr> <td>820K to 182K</td> <td>200A (8/20µs)</td> </tr> </table>	5D Series	180K to 680K	10A (8/20µs)	820K to 751K	20A (8/20µs)	7D Series	180K to 680K	25A (8/20µs)	820K to 821K	50A (8/20µs)	10D Series	180K to 680K	50A (8/20µs)	820K to 112K	100A (8/20µs)	14D Series	180K to 680K	75A (8/20µs)	820K to 182K	150A (8/20µs)	20D Series	180K to 680K	100A (8/20µs)	820K to 182K	200A (8/20µs)	ΔVb / Vb ≤ ±10%
5D Series	180K to 680K		10A (8/20µs)																								
	820K to 751K	20A (8/20µs)																									
7D Series	180K to 680K	25A (8/20µs)																									
	820K to 821K	50A (8/20µs)																									
10D Series	180K to 680K	50A (8/20µs)																									
	820K to 112K	100A (8/20µs)																									
14D Series	180K to 680K	75A (8/20µs)																									
	820K to 182K	150A (8/20µs)																									
20D Series	180K to 680K	100A (8/20µs)																									
	820K to 182K	200A (8/20µs)																									

Part Numbering	Part Marking
<p><b>20 D XXX K J</b></p> <ul style="list-style-type: none"> <li>J: High Surge, without: Standard</li> <li>Tolerance: K: ±10%, L: ±15%, M: ±20%</li> <li>Varistor Voltage</li> <li>Type: D: Disk, S: Square</li> <li>Element Diameter</li> </ul>	<p>With a line: High Surge Without: Standard</p>  <p>Logo Product Type UL Accreditation Logo VDE Accreditation Logo</p>

Package Dimensions Unit: mm




TABLE1	
Symbol	Dimensions
H(max.)	27.0
H1(max.)	27.0
L(min.)	15.0
L1(min.)	15.0
D(max.)	23.0
P(±1.0)	10.0
T(max.)	TABLE2
d(±0.05)	1.0
d1(±0.05)	1.0

TABLE2			
Model	T(max.)	Model	T(max.)
180K	4.8	331K	5.8
220K	4.9	361K	6.0
270K	5.0	391K	6.2
330K	5.2	431K	6.5
390K	5.5	471K	6.7
470K	5.6	511K	6.9
560K	5.7	561K	7.0
680K	5.08	621K	7.2
820K	4.9	691K	7.5
101K	5.1	751K	8.2
121K	5.3	781K	5.3
151K	5.6	821K	8.5
181K	5.0	911K	9.0
201K	5.2	102K	9.5
221K	5.3	112K	10.1
241K	5.4	122K	10.6
271K	5.6	152K	10.0
301K	5.7	182K	13.2

 **SOCAY® Shenzhen Socay Electronics Co., Ltd.**

+8618126201429    sylvia@socay.com    socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City, Guangdong Province, China